GENERAL INFORMATION

C-Series Padlock

High Performance. High Security

Application

Ideal for demanding environments and applications requiring robust protection.

Available Platforms

Compatible with all Mul-T-Lock® patented platforms, excluding MTL™200.

Cylinder Technology

Mul-T-Lock's unique, high-precision pin tumbler system provides enhanced pick and drill resistance for high-security applications.

Common features

- Drainage holes
- Key retaining*

Key Systems

Reversible nickel silver key with plastic key-head and color inserts for quick recognition. **Optional:** full metal key offering the possibility of branded key head.

Shackles and Bolts

All shackles and bolts are made of hardened Boron alloy steel with nickel-chrome finish.

*Unless otherwise specified

Options

- Removable shackle
- Pop-Open shackle with retaining key
- Available with Mul-T-Lock® hasp (No. 10/13/16)
- Available with shackle protector (No. 10/13)

Specifications

Shell: Hardened steel with Black electrophoretic plating.
Core: Aluminum with Black electrophoretic plating.


Features

- Protective shutter
- Drilling protection

Standards

EN12320 – see Grade in the table
ISI technical specification 21



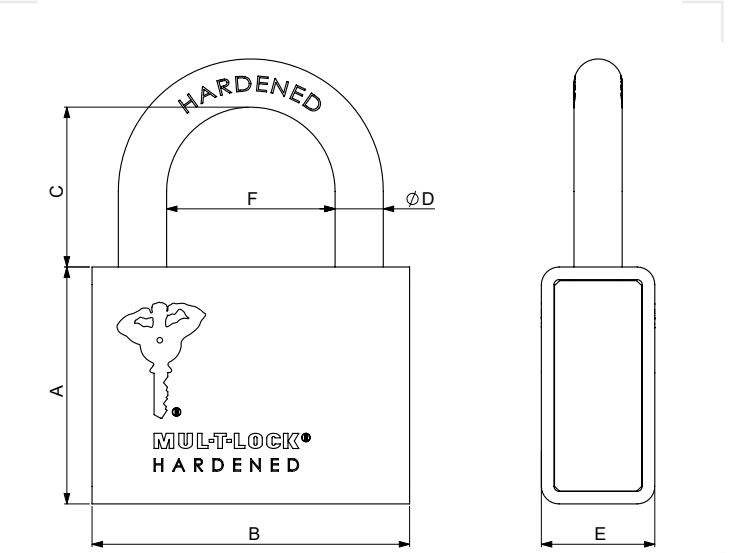

Model	Unit	A	B	Clearance			ø D	E	F	Grade	Suitable hasp
				C1	C2	C3					
*C-6	mm	47	50	22	50	–	6	22	24	–	–
	Inch	1.85	1.97	0.86	1.97	–	0.23	0.86	0.94		
*C-8	mm	47	50	22	50	102	7.9	22	22	3	–
	Inch	1.85	1.97	0.86	1.97	4.1	0.31	0.86	0.86		
C-10	mm	47	63	30	63	102	9.5	22	33	3	10
	Inch	1.85	2.5	1.2	2.5	4.1	0.37	0.86	1.29		
C-13	mm	51	73	37	58	102	12.7	25	33	4	13
	Inch	2	2.87	1.46	2.28	4.1	0.5	0.98	1.29		
C-16	mm	53	92	50	63	102	15.8	32	38	5	16
	Inch	2.1	3.6	1.97	2.5	4.1	0.62	1.26	1.5		

*Available only with a Pop-Open shackle

C-Series Accessories

High Performance. High Security

HASPS

Application

Hasps for Mul-T-Lock® C-Series padlocks with removable shackle.
Can be welded or bolted to steel, wood or aluminum structures.


Specifications

Body: High-quality steel casting with black electrophoretic plating.

Options

Three types to fit 10, 13 and 16.



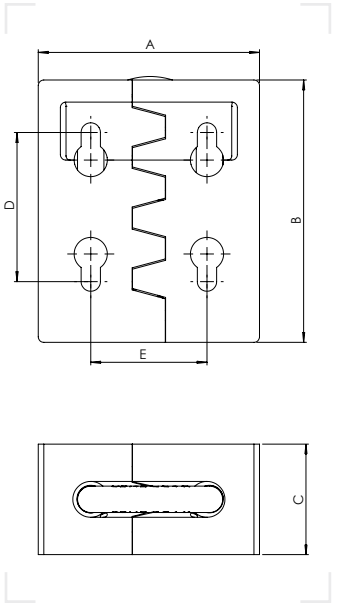

Hasps	Unit	A	B	C	D	E
10	mm	80	95	40	54	42
	Inch	3.15	3.74	1.57	2.13	1.65
13	mm	90	109	40	64	46
	Inch	3.54	4.29	1.57	2.52	1.81
16	mm	110	116	48	73	54
	Inch	4.33	4.57	1.89	2.87	2.13

SHACKLE PROTECTORS

Application

Additional protection for shackles of C-Series padlocks.


Specifications

Body: High-quality steel casting with black electrophoretic plating.

Options

Two types to fit 10 and 13 C-Series padlocks with pop-open shackle.



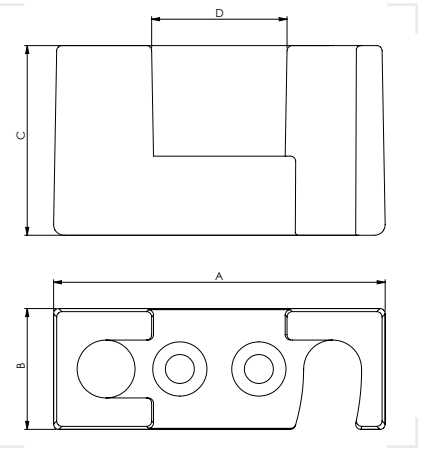

Psdlock	Unit	A	B	C	D
10	mm	63	23	36	25
	Inch	2.48	0.905	1.417	0.984
13	mm	73	25	40	25
	Inch	2.874	0.984	1.574	0.984